



VER 1.0

Hardware Manual

DS-BVS-FETC/FCAO




Table of contents

 [Click to return to table of contents](#)

- 1. Technical Information.....3
 - 1.1 Mechanical Data.....3
 - 1.2 Electrical Data.....4
- 2. Wiring.....5
 - 2.1 Tools.....5
 - 2.2 Connections.....5
 - 2.3 Regenerative Resistance.....6
 - 2.4 Main Power.....7
 - 2.5 UVW.....8
 - 2.6 Analog Encoder.....9
 - 2.7 Biss Encoder.....10
 - 2.8 Digital Encoder.....11
 - 2.9 GPIO.....12
 - 2.10 EtherCAT.....14
 - 2.11 CAN.....15
 - 2.12 RS-485.....16
 - 2.13 USB.....17

1. Technical Information

1.1 Mechanical Data

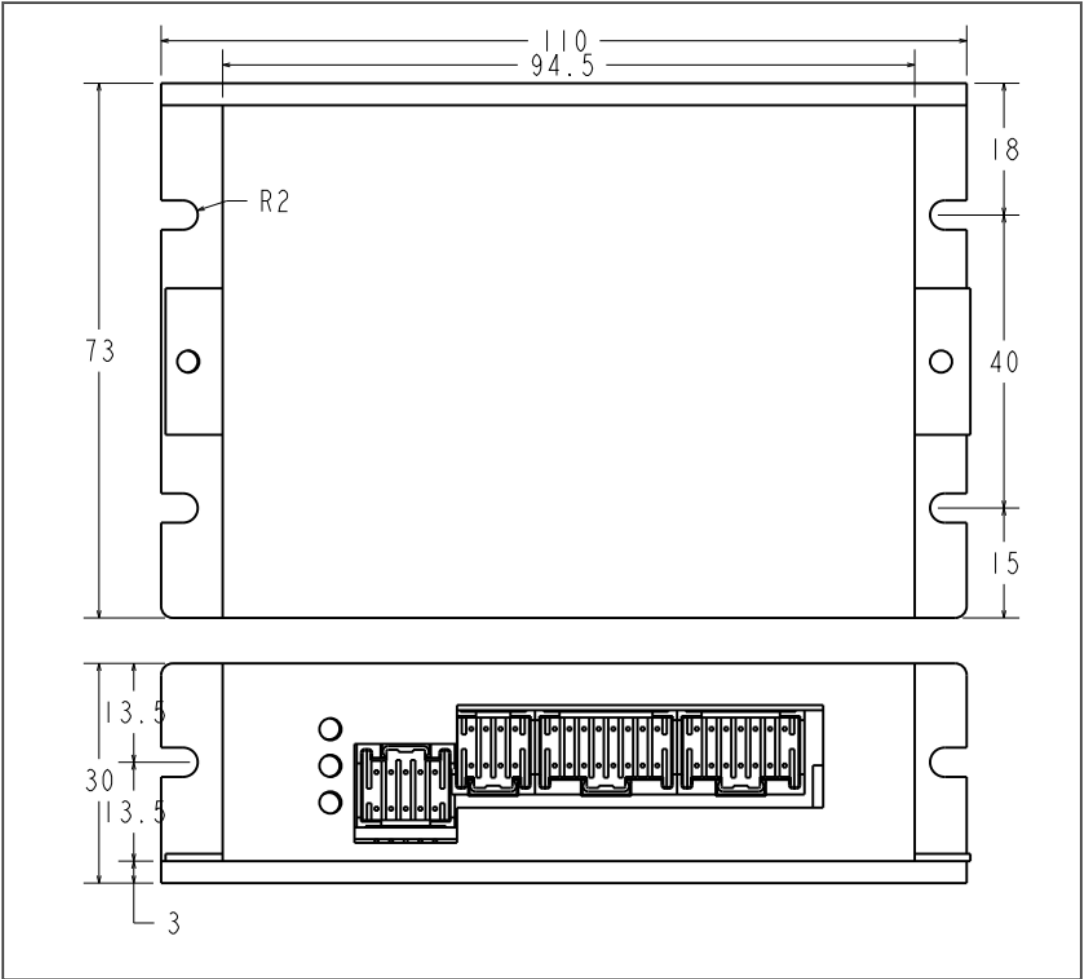

Item	Unit	Description
SIZE (L x W x H)	mm	110 x 73 x 31
Fastener	M3	

1.2 Electrical Data



DS-BVS-FETC/FCAO			
Basic	Motors	DC/BLDC/PMSM/VCM	
	Communication	USB + CANopen or EtherCAT(CoE, FoE)	
	GUI	DINGS' Servo Studio	
	Position Sensor	Incremental Encoder Shared/Separated Hall Sensor Analog Hall Sensor Sin/Cos Encoder SSI/Biss-C/Tamagawa Serial Encoder	
Inputs & Outputs	Analog Input	Quantity	1
		Voltage Range	Analog ± 10 VDC differential
		Input Resolution	14 bit
	Digital Input	Quantity	6 (with STO)
		Signal	Configurable. Opto-isolated
		Voltage	24V
	Digital Output	Quantity	2
		Signal	Configurable. Opto-isolated. Open collector
		Voltage	24V
		Max. Output Current	50mA
Motor Feedback	General	Supply Voltage	5VDC
	Incremental Encoder	Signal	A-quad-B with or without index, shared digital hall sensor, RS422, Differential
		A-quad-B Max Input Frequency	10MHz (before quadrature)
	Digital Hall Sensor	Signal	Differential-ended
		Type	Separated and shared hall sensor
	Analog Hall Sensor	Signal	0~5V, Single-ended
		Sampling Frequency	24KHz
	Sin/Cos Encoder	Signal	-0.7~+0.7V at 2.5V
		Sampling Frequency	24KHz
	Serial Encoder	Type	SSI, Biss-C, Tamagawa
		Bite rate	0.5Mbps, 1Mbps, 2Mbps, 2.5Mbps, 5Mbps



2. Wiring

2.1 Tools



Tool	Manufacturer	Part Number
Hand crimp Tool	MOLEX	63811-6300

2.2 Connections

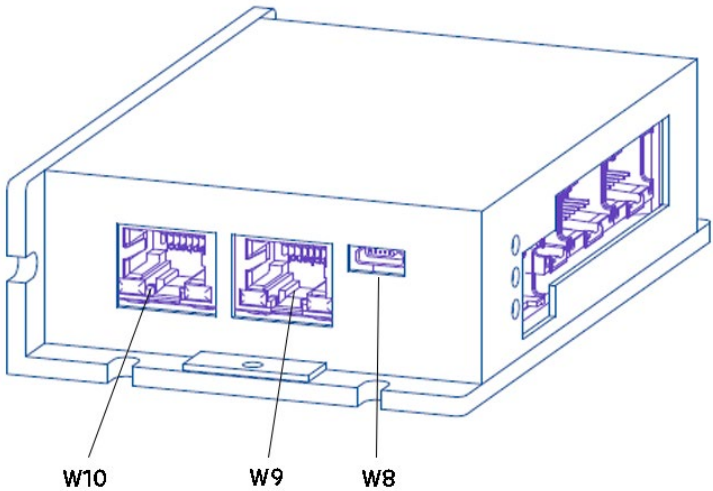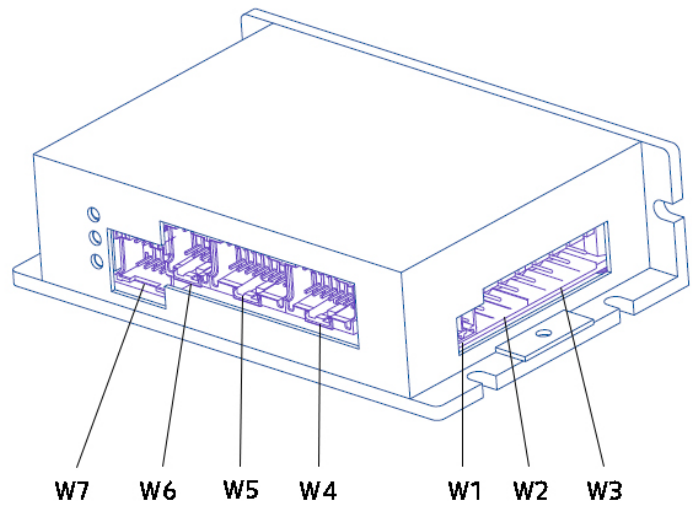


- W1 → Regenerative resistance
- W2 → Main Power
- W3 → Motor Power
- W4 → Analog Encoder
- W5 → Digital Encoder
- W6 → Serial Encoder
- W7 → GPIO
- W8 → USB
- W9 → EtherCAT Output
- W10 → EtherCAT Input

2.3 Regenerative Resistance




ECH350R-02P		J904
Pin	Input Power	
1	R+	
2	R-	

2.4 Main Power

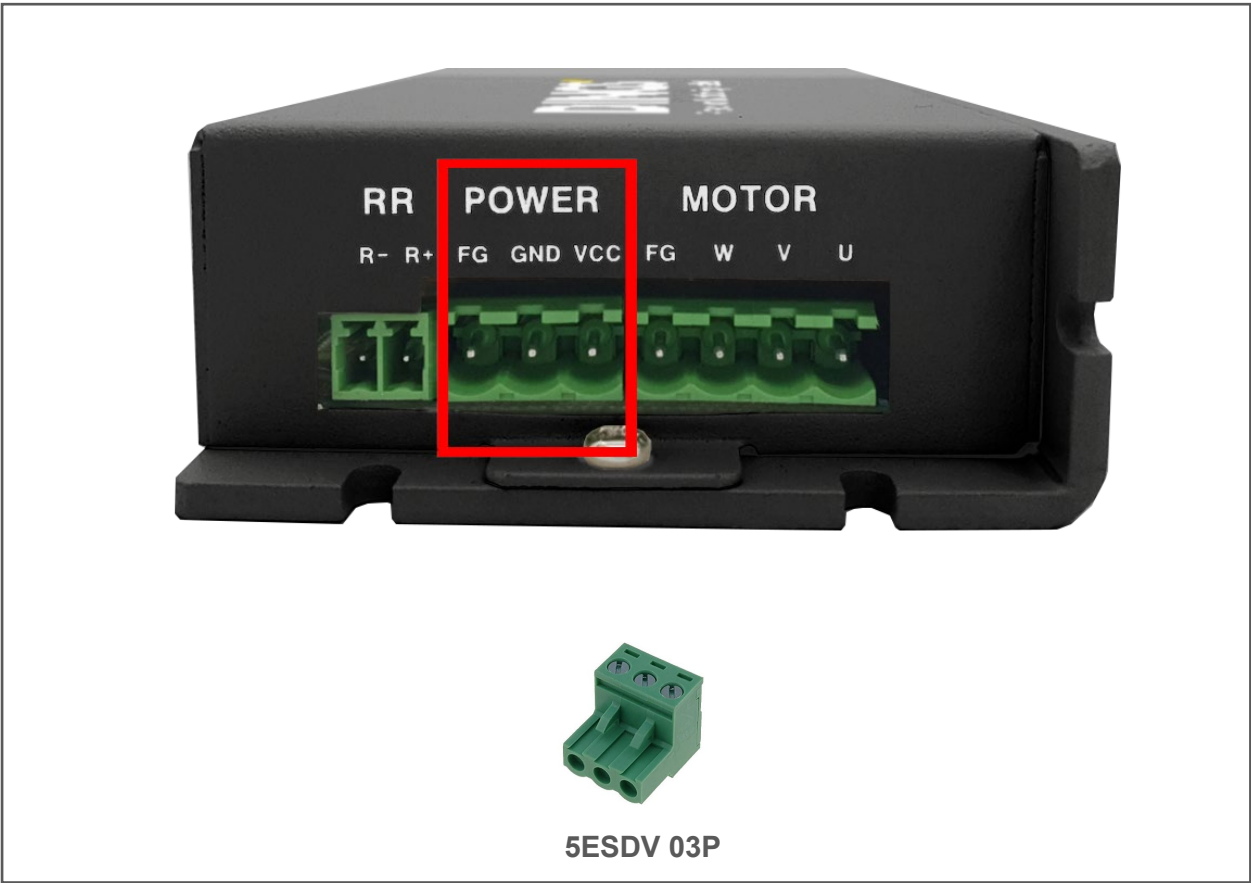


5EHDR-03P		J1
Pin	Signal	Input Power
1	VCC	12V ~ 48V DC
2	GND	GND
3	FG	FG

2.5 UVW

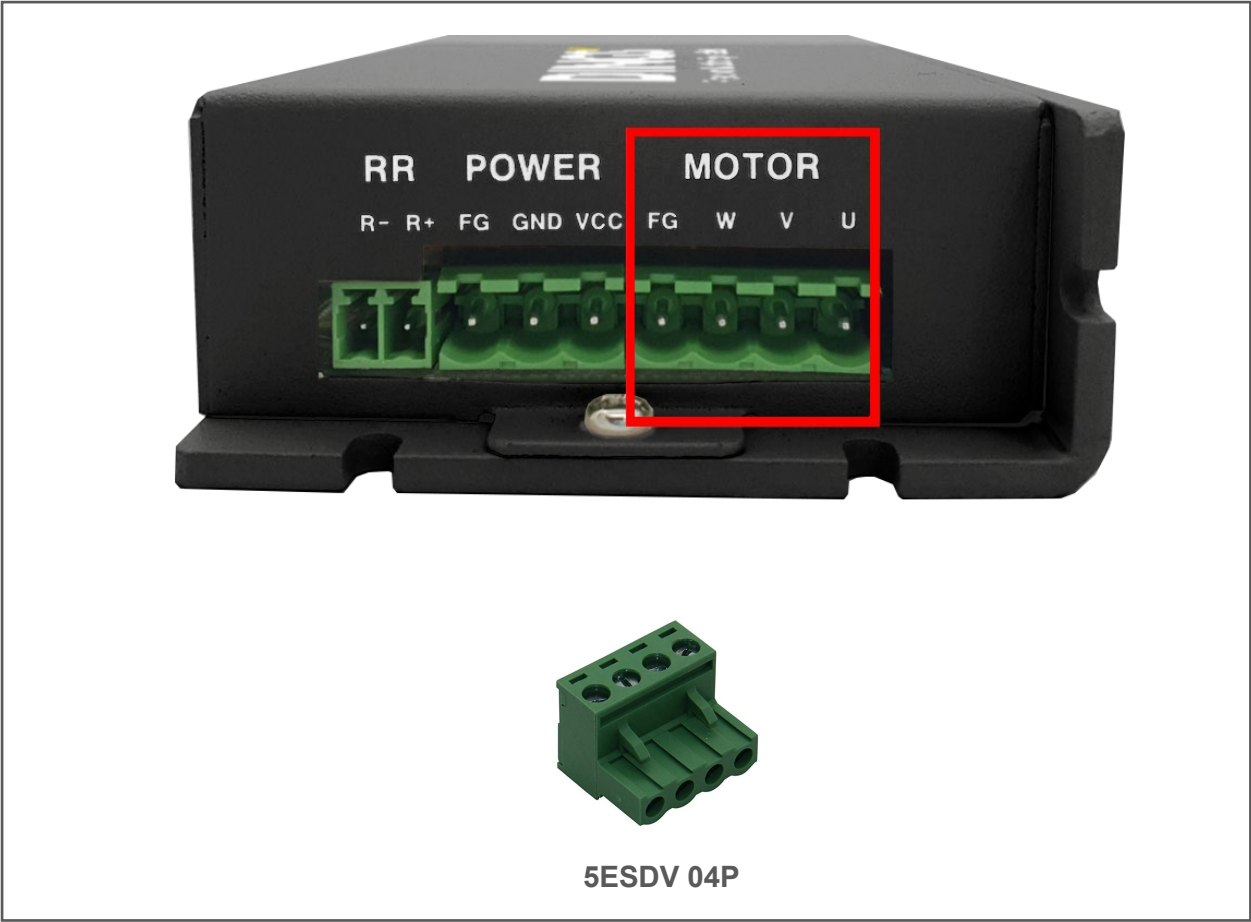


5EHDR-04P		J101
Pin	Signal	
1	U	
2	V	
3	W	
4	FG	

2.6 Analog Encoder

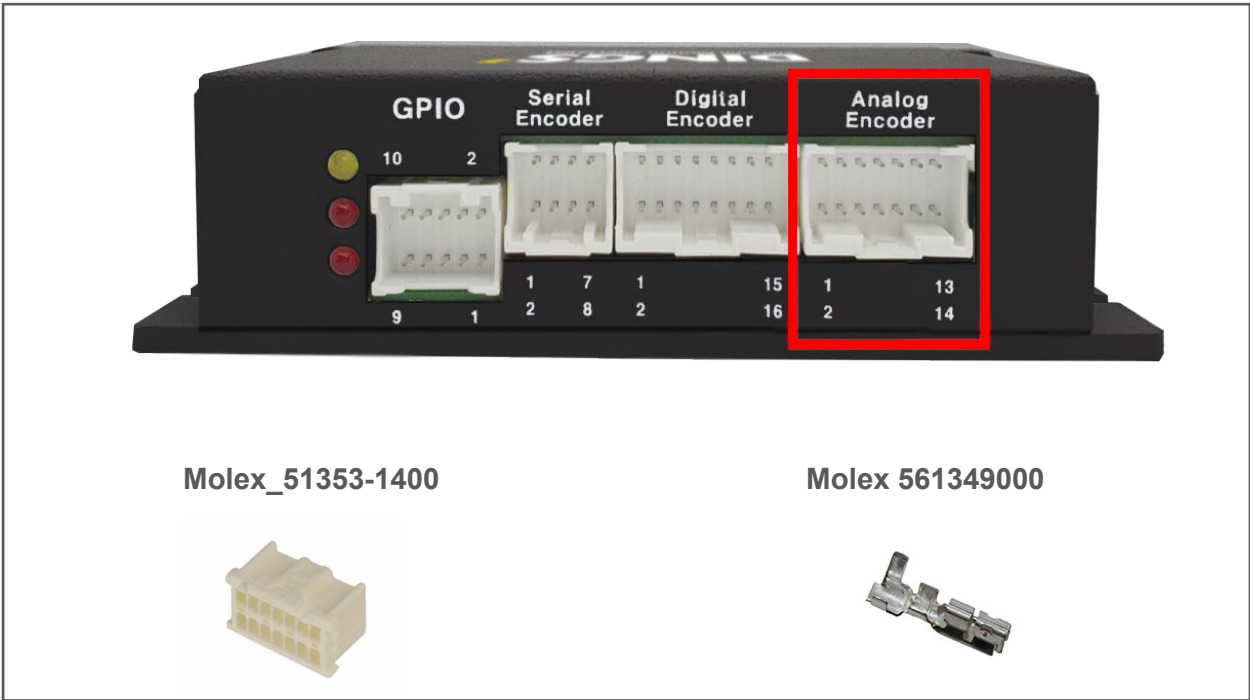


MOLEX 55959-1430		J901
Pin	Signal	
1	SIN+	
2	SIN-	
3	COS+	
4	COS-	
5	REF+	
6	REF-	
7	5V	
8	GND	
9	FG	
10	AHALL_U	
11	AHALL_V	
12	AHALL_W	
13	AIN+	
14	AIN-	

2.7 Biss Encoder

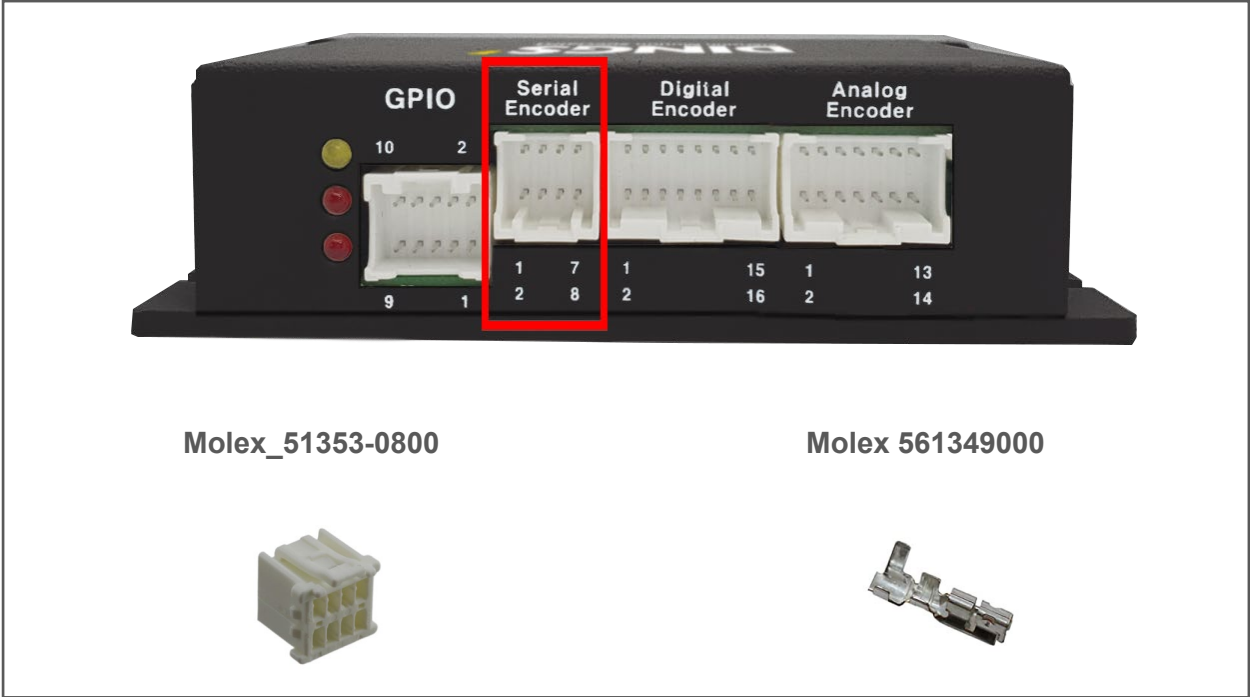

MOLEX 55959-0830		J801
Pin	Signal	
1	BISS_DATA+ (SLO+)	
2	BISS_DATA- (SLO-)	
3	BISS_CLK+ (MA+)	
4	BISS_CLK- (MA-)	
5	RS485_RTX+	
6	RS485_RTX-	
7	5V	
8	GND	

2.8 Digital Encoder

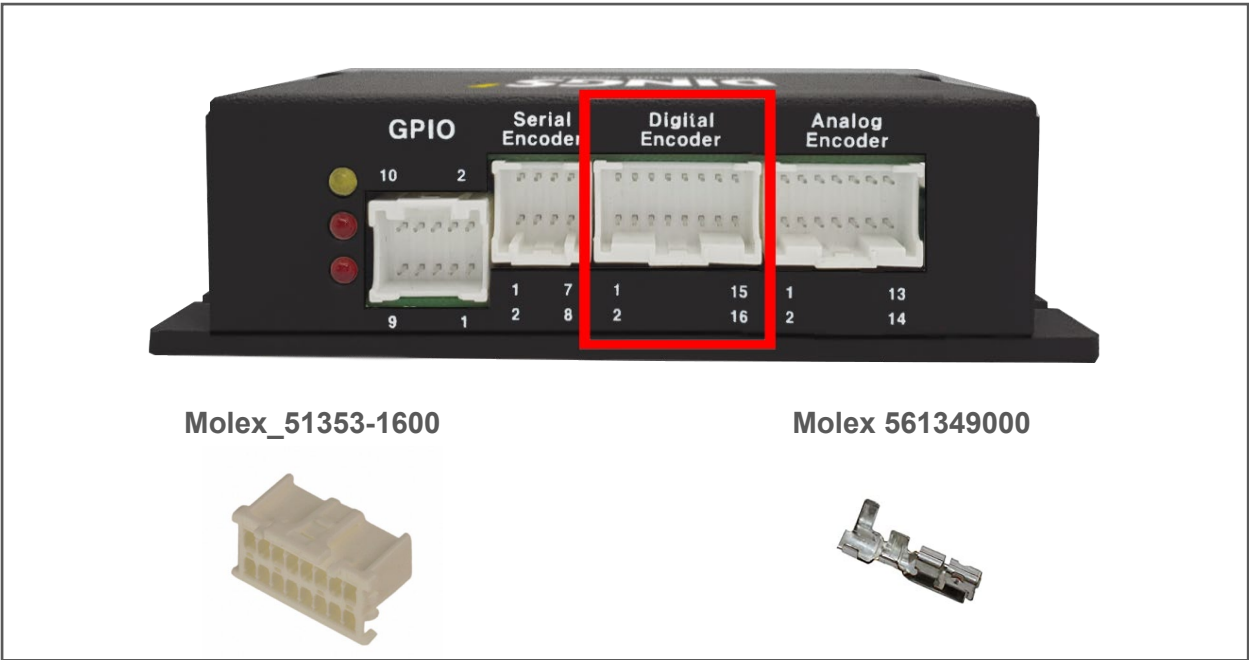


Molex 55959-1630		J701
Pin	Signal	
1	5V	
2	GND	
3	Encoder A+	
4	Encoder A-	
5	Encoder B+	
6	Encoder B-	
7	Encoder I+	
8	Encoder I-	
9	HALL U+	
10	HALL U-	
11	HALL V+	
12	HALL V-	
13	HALL W+	
14	HALL W-	
15	FG	
16	GND	

2.9 GPIO




Molex 55959-1030		J301
Pin	Signal	
1	STO	
2	NEGATIVE_LIMIT	
3	POSITIVE_LIMIT	
4	HOME	
5	GPI 0	
6	GPI 1	
7	GPI_COMMON	
8	GPO 0	
9	GPO 1	
10	GPO_COMMON	

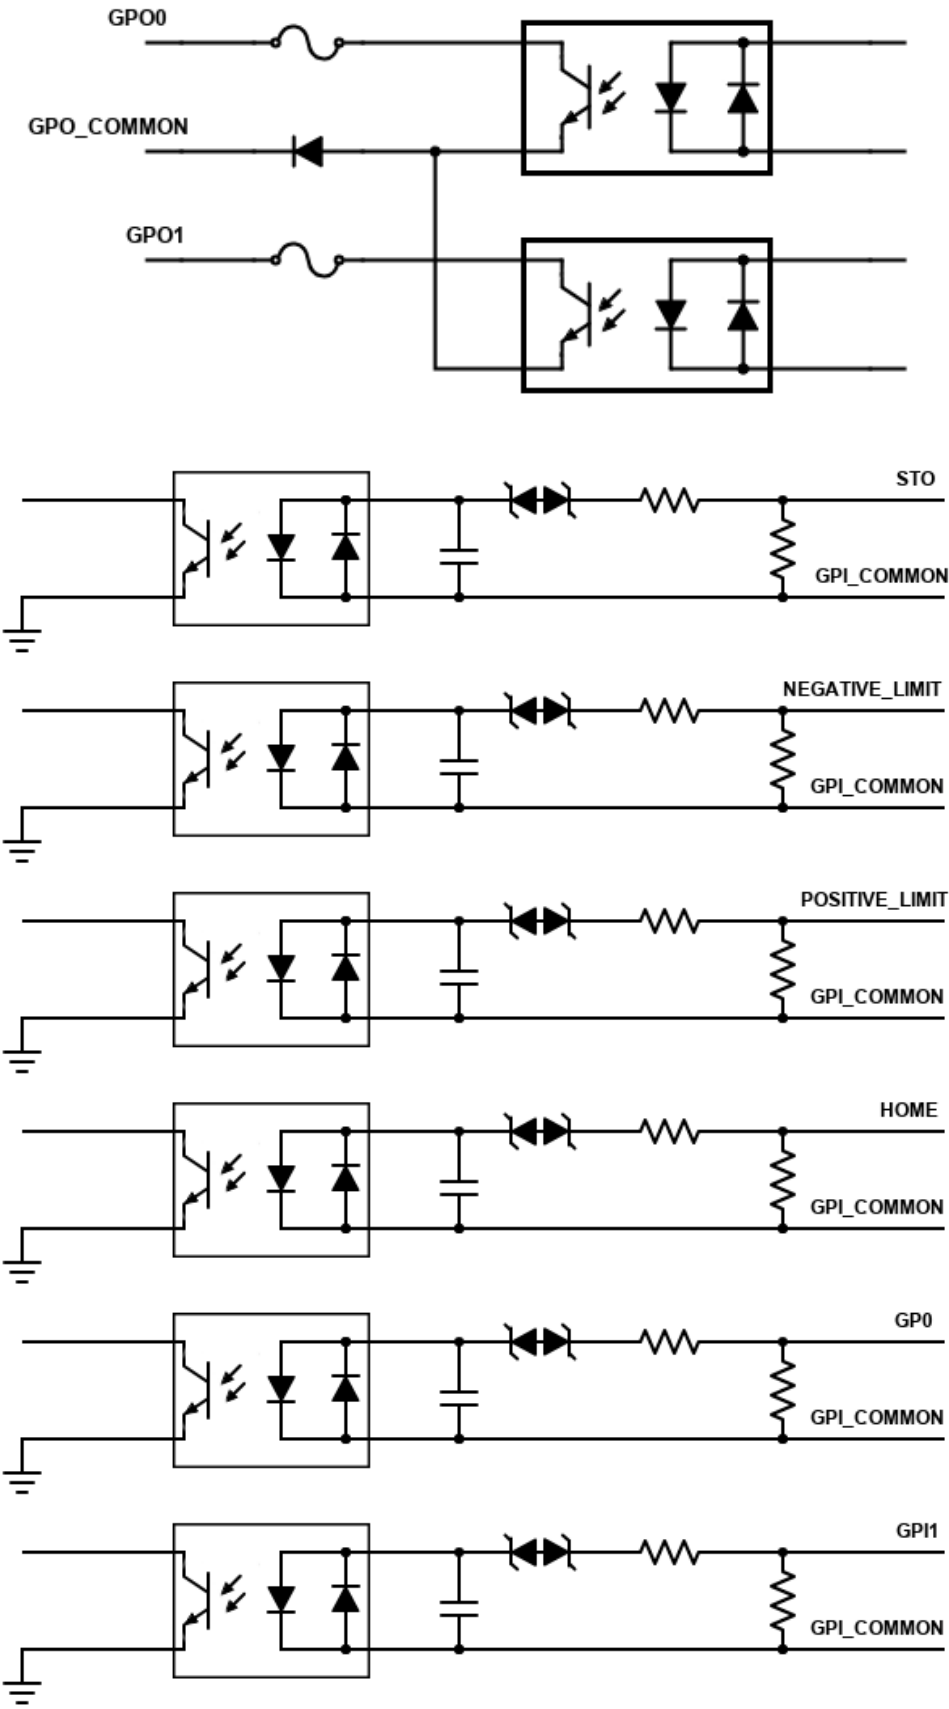


[GPIO Circuit]

2.10 EtherCAT

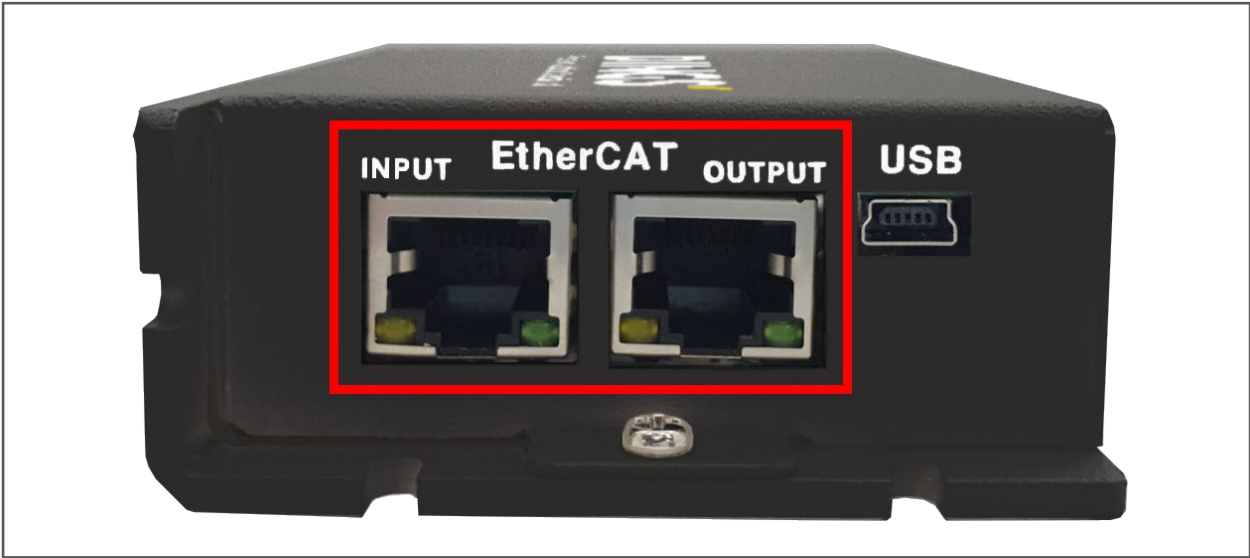


8pin RJ45	
Pin	Signal
1	EtherCAT Tx+
2	EtherCAT Tx-
3	EtherCAT Rx+
4	NC
5	NCs
6	EtherCAT RX-
7	NC
8	NC

2.11 CAN

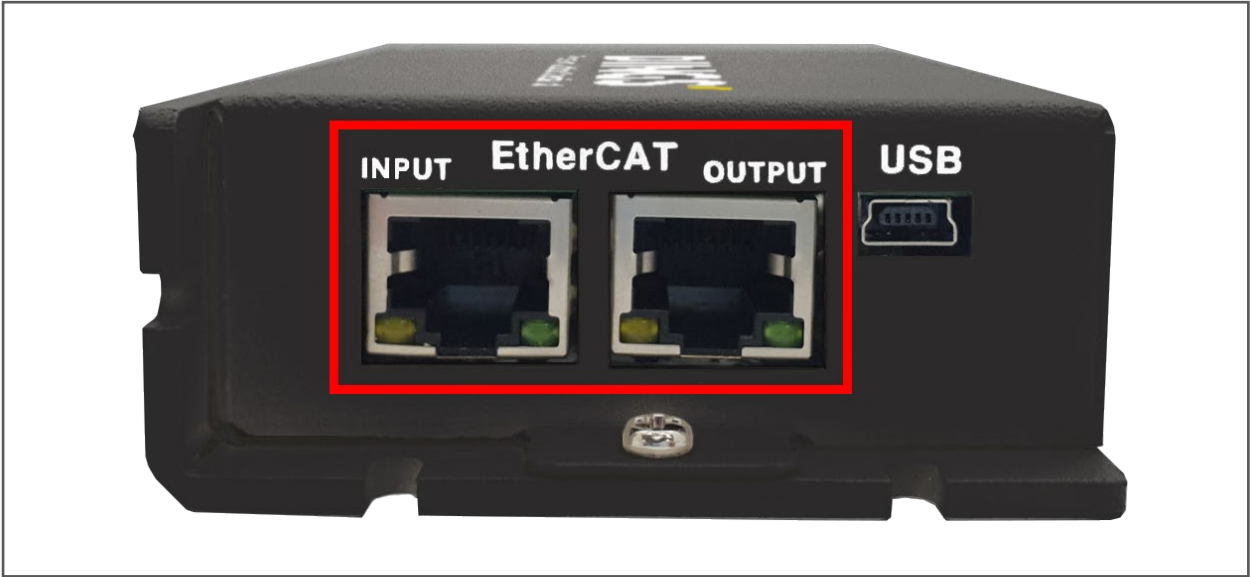


8pin RJ45	
Pin	Signal
1	HIGH
2	LOW
3	GND
4	NC
5	NC
6	NC
7	GND
8	NC

2.12 RS-485

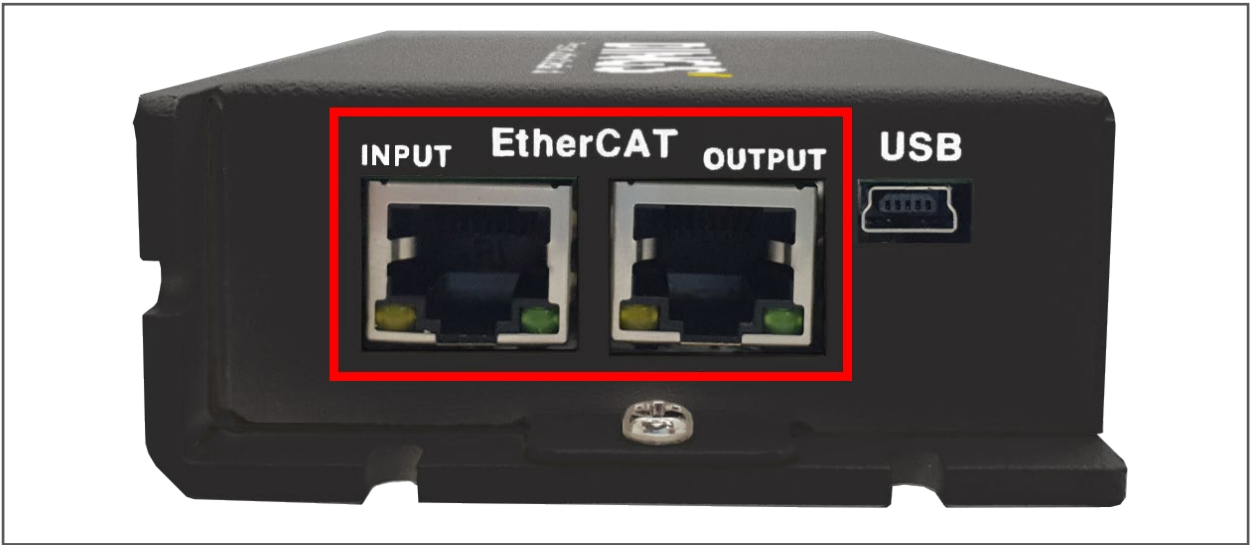

8pin RJ45	
Pin	Signal
1	RTD+
2	NC
3	GND
4	RTD-
5	NC
6	NC
7	NC
8	NC

2.13 USB

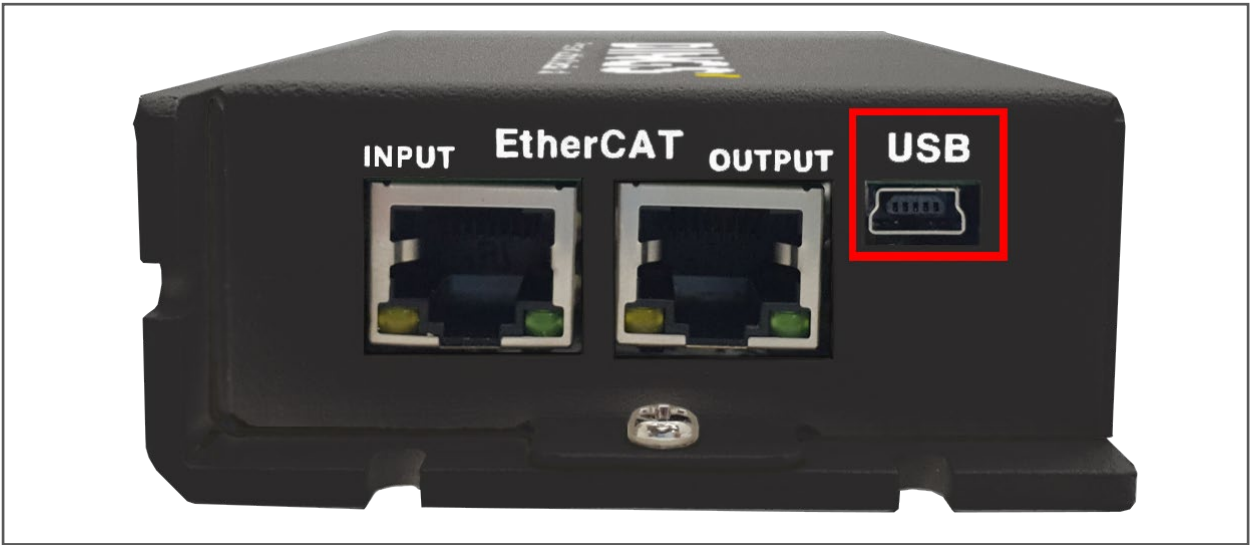

USB-Mini Type B (Keystone Model : 937)	
Pin	Signal
1	VBUS
2	DM
3	DP
4	ID
5	GND
6	SHIELD



+86-0519-8517 7825



+86-0519-8517 7807



No.9, Lijiang Road, New District, Changzhou
Jiangsu, China [Zip Code 213022]



www.dingsmotion.com

International Customer

Person in Charge : **Daniel Jang**

daniel@dingsmotion.com

No.9, Lijiang Road New District,
Changzhou Jiangsu, China

+86-519-85177826, 85177827

North America Customer

Person in Charge : **Nicolas Ha**

nha@dingsmotionusa.com

335 COCHRANE CIRCLE
MORGAN HILL, CA 95037

+1-408-612-4970

China Customer

Person in Charge : **Sweet Shi**

slq@dingsmotion.com

No.9, Lijiang Road New District,
Changzhou Jiangsu, China

+86-519-85177826, 85177827

It is prohibited to copyright or replication of the part or whole of user manual without permission.